

PERMATEX 300HD

Protective separation geotextile for sub-surface hollow geocellular structures to prevent soil from


entering the system. Waterpermeable, usable in water detention and infiltration designs.

Applications

- Blue-Green roofs
- Podium Decks
- Sports
- Equestrian
- Urban Trees
- Landscaped SUDS
- Hardscaped SUDS.

GENERAL

Brand	Permavoid
Product Name	Permatex 300 HD
Item nr.	3570008
Product type	Geotextile
Color	Grey
Material	Polypropene, UV stabilised
Material description	Heavy duty non-woven, needle punched geotextile
Recycled/new	New
Design life	60 years
Certification	CE

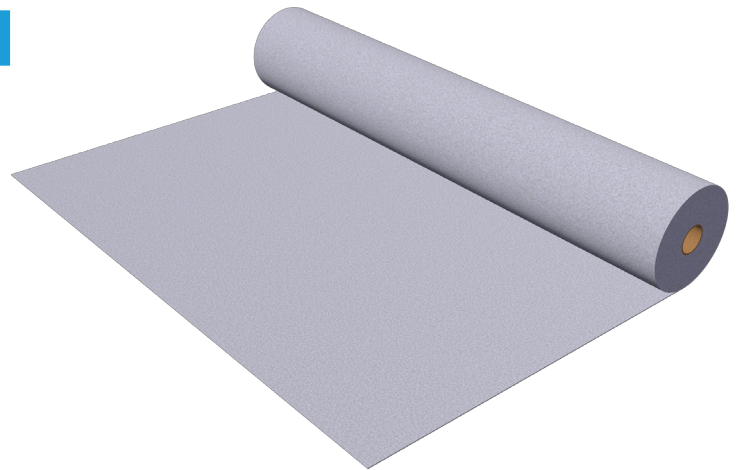

PERMATEX 300HD

SIZE

Roll size		100 x 6 m, 600 m ²
Unit weight	EN ISO 9864	285 g /m ²
Thickness (under load 2 kPa)	EN ISO 9863-1	2,6 mm
CBR Puncture resistance	EN ISO 12236	3,300 N
Dynamic cone drop	EN ISO 13433	16 mm
Tensile strength at max load (MD)	EN ISO 10139	22 kN/m
Tensile strength at max load (CD)	EN ISO 10139	22 kN/m
Elongation at max load (MD)	EN ISO 10139	80%
Elongation at max load (CD)	EN ISO 10139	70%
Protection efficiency	EN ISO 14575	300 N
Breakthrough head	EN ISO 10319	Nil
Water permeability vertical	EN ISO 11058	65 l/m ² /s
Characteristic opening size	EN ISO 12956	90 microns

PACKAGING

Packaging	Roll
Size	500 x 6.000 mm (Diam. x W.)
Capacity	600 m ²
Total weight	approx. 183 kg
Storage instruction	Store in original factory wrap
HS Code	56021019

Notes

Permavoid Ltd. will not be held liable if our products are used in a manner inconsistent with our requirements, standards or the purposes indicated in the standards. Standards can be obtained at www.permavoid.com. This document is not contractual. With our constant concern for improvements, the information this document contains and the products presented may be modified without notice. The latest version of this document can be obtained at www.permavoid.com. Please get in touch with us if you require any further documentation or information.

Instructions

Geotextile to be placed continuously around all drainage surfaces. Overlaps shall be a minimum of 300 mm. Geotextile to be placed as soon as possible after installation of drainage units.

Data Sheet: PDS-10
Last revised: January 2021

Permavoid Head Office

Kattenburgerstraat 5

1018 JA | Amsterdam | The Netherlands
www.permavoid.com | info@permavoid.co.uk

Permavoid Ltd. is part of the Polypipe Group.