

# PERMATIE

The strength of a raft of Permavoid units is not only determined by the strength of the units but depends on the strength of the joints in between the units as well. The Polypropene PermaTies are designed to be slightly conical so they pull the individual units tightly together to form a rigid raft. For the Permavoid 150


two ties per joint over the full depth are used (one inserted from each side), where for the Permavoid 85 and 85S one PermaTie per joint suffices. The PermaTies are white, so during installation one can easily spot where one is missing.

## Applications

Connecting component for all Permavoid units in all applications.

### GENERAL

|                             |  |
|-----------------------------|--|
| <b>Brand</b>                | Permavoid  |
| <b>Product name</b>         | PermaTie   |
| <b>Item nr.</b>             | 3510001  |
| <b>Color</b>                | White  |
| <b>Material</b>             | Polypropene (CoPo)   |
| <b>Material description</b> | Frost resistant, hydrofoob, inert, acid and hydrocarbon resistant, impervious to bacterial and fungal growth |
| <b>Recycled/Virgin</b>      | Recycled   |
| <b>Lifespan</b>             | > 50 years   |

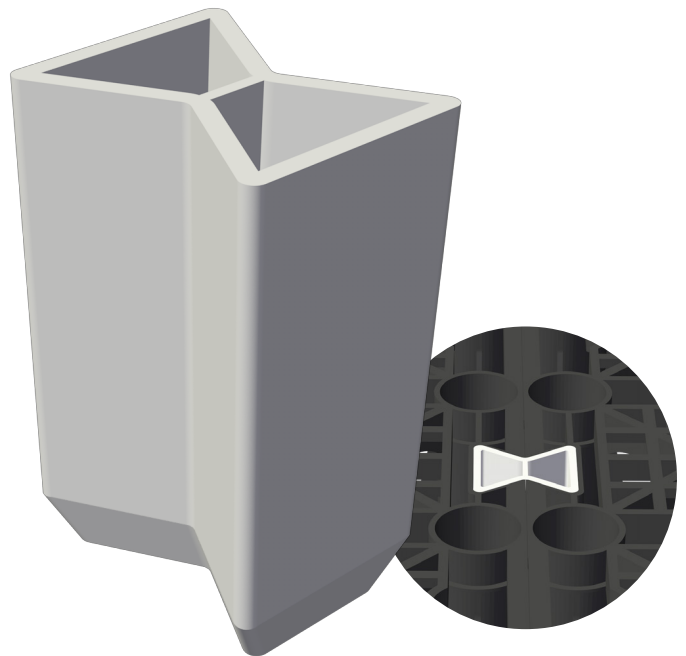

# PERMATIE

## SIZE

|  |   |
|--|---|
| <b>Size</b>                                    | 47 x 37 x 74 mm<br>(L x w x h, approx.) |
| <b>Weight</b>                                  | approx. 35 g                            |
| <b>Color</b>                                   | White                                   |
| <b>Coefficient of Linear Thermal Expansion</b> | 0,0004 - 0,0008 m/m K                   |

## PACKAGING

|                            |                                     |
|----------------------------|-------------------------------------|
| <b>Packaging</b>           | Pallet-box, 3.000 pcs               |
| <b>Pallet size</b>         | 1.200 x 800 x 940 mm<br>(L x w x h) |
| <b>Pallet capacity</b>     | 3.000 pcs                           |
| <b>Pallet total weight</b> | 110 kg                              |
| <b>Storage instruction</b> | Store dry                           |
| <b>HS Code</b>             | 39269097                            |

### Notes

Permavoid Ltd. will not be held liable if our products are used in a manner inconsistent with our requirements, standards or the purposes indicated in the standards. Standards can be obtained at [www.permavoid.com](http://www.permavoid.com). This document is not contractual. With our constant concern for improvements, the information this document contains and the products presented may be modified without notice. The latest version of this document can be obtained at [www.permavoid.com](http://www.permavoid.com). Please get in touch with us if you require any further documentation or information.

Data Sheet: PDS-5  
Last revised: January 2021

### Permavoid Head Office

Kattenburgerstraat 5  
1018 JA | Amsterdam | The Netherlands  
[www.permavoid.com](http://www.permavoid.com) | [info@permavoid.co.uk](mailto:info@permavoid.co.uk)

Permavoid Ltd. is part of the Polypipe Group.